



Z-RIGID ALL-FUEL MAX DRAFT

Z-Rigid Smooth Wall Liner

- Designed for use with All Fuels - Wood, Pellet, Corn, Oil, Gas
- Fusion welded seams
- Precision engineered for lowest flow resistance
- cULus listed to 2100°F creosote burnout test
- Lifetime warranty



Z-RIGID SPECIFICATIONS	
Material:	type 304 stainless steel, 0.018" thickness
Construction:	fusion welded seams
Listing:	cULus 1777/S635 Chimney Liner System
Use:	Category 1 natural draft appliances; wood, pellet, gas, propane, oil

Rain Cap

- * Wind-proof
- * Bird resistant
- * Attractive
- * Prevents entrance of moisture/debris
- * Corrosion resistant

Flashing


- * Full 16" x 16" base - accommodates all chimney sizes
- * Welded collar stabilizes liner, provides clearance from snow accumulation
- * Prevents entrance of snow and rain into chimney cavity

Z-Rigid Liner

- * Fusion welded seams - no filler material
- * Engineered super close tolerance fit
- * Expanded ends provide smooth interior - no crimped ends
- * Pre-punched holes - no drilling required
- * High corrosion resistant 304 S/S
- * Easy to assemble

Flex Tee (Cleanout)

- * 3pc. with removable snout and clean out
- * All stainless steel
- * Fail-safe mechanical connection from snout to body

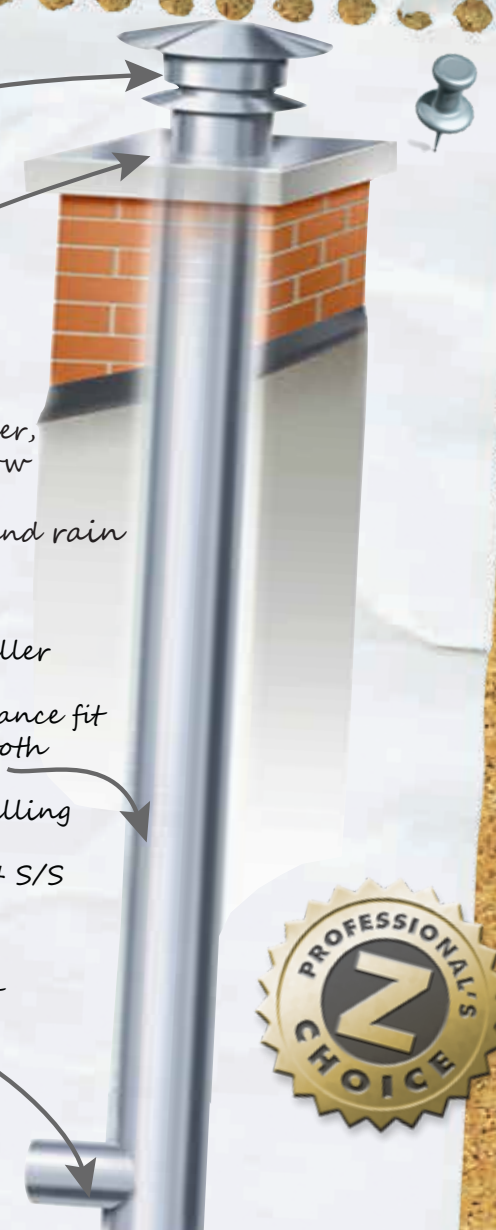

U.S.A. 1.800.654.5600
CANADA 416.679.0045

Fax 603.669.0309
Fax 416.679.0051

EMAIL sales@z-flex.com
WEBSITE www.z-flex.com



Specialized Vents, Hoses Ducts & Connectors for any use, any industry