



Insul-Vent® Flexible Gas Vent Connector System

Lightweight · Easily Handled · Easily Flexed

INSUL-VENT® Double Wall Flexible Insulated Vent Connector System

Designed to make insulated connections between appliance and common vent (B-Vent, masonry chimney, or Z-Flex® chimney liner products), easy and economical.


Insul-Vent® Lateral “Y” makes installation even easier!

Universal B-Vent “Y” adapts to any existing B-Vent Chimney !

Installs in half the time.

- Simply cut to desired length and attach quick connect ends. No drilling or screwing required.
- Eliminates costly elbows and accessories.
- Cut to length on site, universal connectors
- 1” clearance to combustibles, same as B-Vent
- For use with Category I appliances that are listed for use with Type B gas vent such as: furnaces, water-heaters and boilers.

Canada only: National Code requires any atmospheric (Category I) gas fired appliance 77MBTU and Under must have an insulated vent connector.

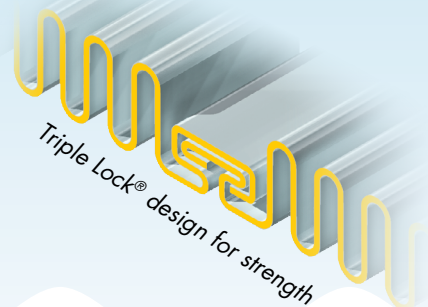


Triple Lock® design for strength



Insul-Vent® Flexible Gas Vent Connector System

Insul-liner® Kit Includes:

Insulated Aluminum Liner
 Chimney Flashing
 Rain Cap
 Mortar Collar
 3 Screws
 Part No.: 2GIAKXX
 Dia.: ____ | Lgth.: ____
 Dia.: 3", 4", 5", 6", 7", 8"
 Lengths: 15'



Insul-liner® Gas Fireplace Kit Includes:

Insulated Aluminum Liner
 Chimney Flashing
 Rain Cap
 Fireplace Connector
 3 Screws
 Part No.: 2GIAFKX
 Dia.: ____ | Lgth.: ____
 Dia.: 4", 5", 6"
 Lengths: 15ft.



Single Wall Vent Connector Kit

Single-Vent includes: UL approved Single Wall Flex, Appliance Connector, Universal Connector.
 Please specify diameter and length at time of order.

Double Wall Insulated Vent Connector Kit

Insul-Vent® includes: UL approved Double Wall length of Insul-Vent®, Appliance Connector, Universal Connector.
 Please specify diameter and length at time of order.

Typical Installations*



Multiple Appliance B-Vent Single Appliance B-Vent

**All images are for illustrative purposes only. Please refer to guide for specific U.L. installation instructions. Always defer to local building codes.*

Z-Flex® Connector System

This cULus listed connector meets the requirements of NFPA 54, ANSI 2231 and NFPA 211.

Usage

Double-wall flexible vent connector for connecting one or more appliances to double-wall Type B gas vents and listed Z-Flex liners. Use only with Category I appliances listed for use with Type B gas vent.

Warning

Do not enclose. Do not pass through walls, floors or ceilings.

The information provided within is for informational purposes only. We have made every effort to ensure the accuracy of the provided information and assume no responsibility for any loss or damage due to errors or omissions or to the use or misuse of any information supplied. It is impossible to test all products under all conditions to which they might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all products under the conditions that duplicate the service conditions prior to installation. All improvements, all specifications are subject to change without prior notice. It is the buyer and/or end users' responsibility to review our complete **Terms and Conditions of Sale** located on our web sites at: www.novaflex.com | www.z-flex.com | www.flexmaster.com.

U.S.A.

20 Commerce Park North, Bedford, NH 03110-6911
 tel: 603.669.5136 fax: 603.669.0309

CANADA

452 Attwell Drive, Etobicoke, ON M9W 5C3
 tel: 416.679.0045 fax: 416.679.0051

www.z-flex.com email sales@z-flex.com